



## Datasheet

### Cable Handswitch for installation in the desktop

HSE

Rev 4



MOTION FOR YOUR LIFE



Subject to change without notice. Errors and omissions excepted.

**LOGICDATA** cannot accept responsibility for incorrect operation or use of the products other than for the intended purpose.

Under the warranty terms, **LOGICDATA** shall replace or repair any products that prove defective at the time of delivery. **LOGICDATA** shall not assume any further liability.

If you have any questions or special requests, please contact **LOGICDATA** direct.

©2011 **LOGICDATA**

[www.logicdata.at](http://www.logicdata.at)



## Contents


1. Features .....	3
2. Type and Dimensions.....	3
3. Technical Data .....	3
4. Compatibility.....	4
5. Order Code.....	4
6. Manufacturer .....	4



## 1. Features

- Ergonomic design
- No projecting parts
- Longlife foil buttons
- Available with or without display
- Quick installation

## 2. Type and Dimensions <sup>1)</sup>

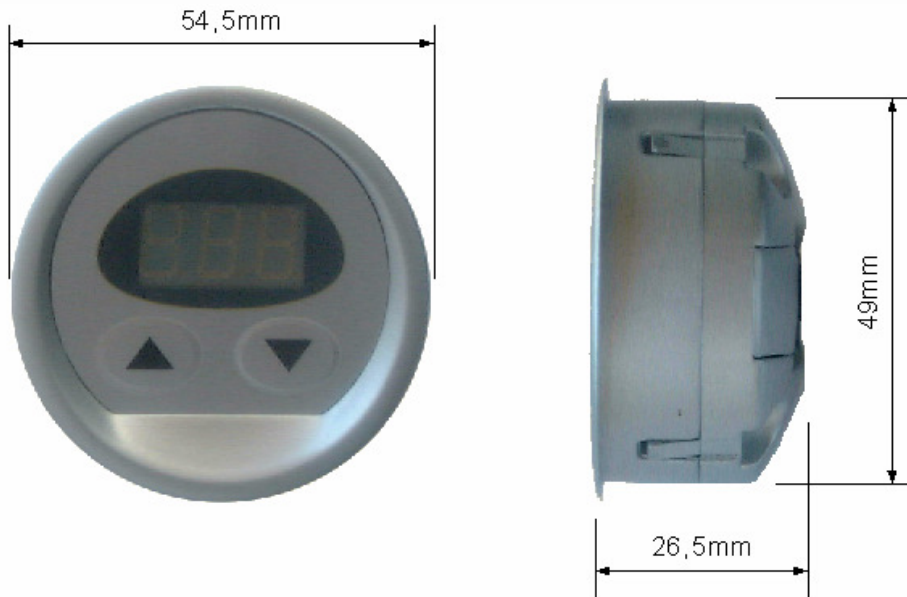

## 3. Technical Data <sup>1)</sup>

### General


Supply voltage	5VDC $\pm$ 10%
Current consumption (average)	60 mA
Life cycle (switching cycles)	10. 000
Ambient temperature	0 – 50° C
Cable length	2000 mm $\pm$ 50mm
Dimensions (l, w, h)	$\varnothing$ 54,5mm x 26,5mm
Weight	0,1 kg (incl. Cable)

1) Dimensions in mm; Tolerances according to DIN ISO 2768-1 c



## Pin assignment

Handswitch connector (according to DIN 45329)



1	HS1	5	HS4
2	HS3	6	+5V
3	n.c.	7	SER_OUT
4	HS2	Shell	GND
n.c.	not connected		

(pin alignment according to DIN 45329)



**Caution:** The HSE handswitch is only suitable for LOGICDATA motor controls. To prevent damage of the unit, take care not to interchange handswitch and motor sockets.

**Colour code:** Handswitch: blue  
Motor: black



**Caution:** Do not use a HSE handswitch in combination with another handswitch linked with a Y-HS cable! The control box would misinterpret the instructions of the handswitch.

## 4. Compatibility

The HSF handswitch is compatible to following LOGICDATA motor controls:

- CBS-X-XXX
- CBB-X-XXX
- CBX-X-XXX
- LogicS-X-XXX
- LogicB-X-XXX
- Compact-X-XXX

## 5. Order Code

- HSE-MDF-2-LD ..... Up/Down buttons, Display

## 6. Manufacturer

### LOGICDATA

Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18  
A-8530 Deutschlandsberg

Tel.: +43 (0)3462 5198 0

Fax: +43 (0)3462 5198 530

Email: [office@logicdata.at](mailto:office@logicdata.at)

[www.logicdata.at](http://www.logicdata.at)